

Støttet



Hvete



Bygg



Rug




Havre




Frøeng

Installer Atfarm mobil-appen

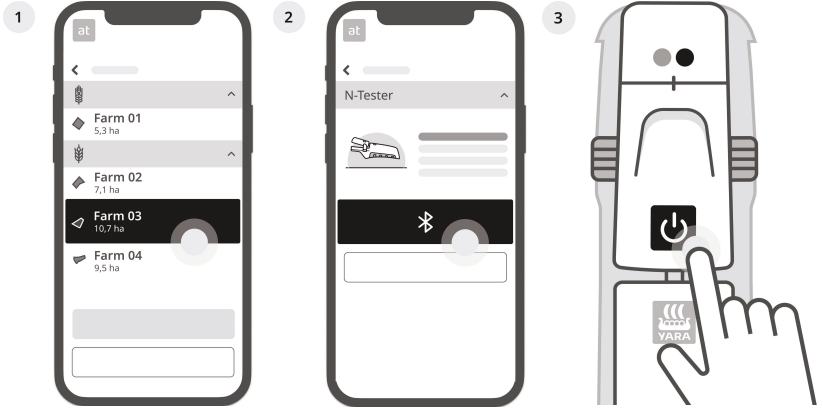

NORSK

N-Tester BT

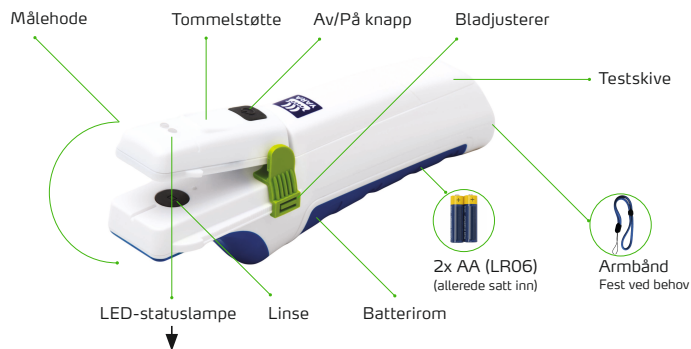

Blinker blått	Søker etter Atfarm mobil-appen
Stabil blått	Tilkobling lyktes
Blinker rødt (5 sekunder etter start)	Batterier trenger å byttes

Feilkilder



support@at.farm
https://ntbtmanual.at.farm



På noen smarttelefoner vil et vindu med Bluetooth®-tilkoblingsalternativer vises, vennligst ikke koble til N-Tester BT i dette vinduet.

Yara N-Tester BT er en bærbart nitrogentester som måler klorofyllinnholdet i bladet. Ikke bruk dette instrumentet til noe annet formål.

Les punktene under for å unngå feilaktige målinger:

- Ikke foreta målinger ved feil utviklingstrinn.
- Ikke foreta målinger på blader som ikke er fullt utviklet.
- Ikke foreta alle målinger på den samme planta.
- Ikke foreta alle målinger på et lite område av skiftet.
- Ikke bruk N-Tester på områder med svovelmangel.
- Ikke bruk N-Tester på områder med synlig tørkestress (blad som er krøllet sammen).
- Ikke bruk N-Tester med en utdatert versjon av Atfarm mobil-appen.

Batteri feilkilder

- Ikke demonter eller kortslett batteriene.
- Ikke varm opp batteriene, eller forlat de nær varmekilder.
- Ikke la batteriene bli våte eller neddykket i vann.
- Ikke slå, skad, kast, eller trakk på batteriene.

NORSK

Håndtering og riktig bruk

Rengjør enheten med en fuktig klut. Ikke bruk kjemiske rengjøringsmidler eller plasser under rennende vann. Vær forsiktig med linsen på innsiden av målehodet. Hvis det er nødvendig, rengjør du linsen med en ren, tørr og myk klut.

Gamle N-Tester BT enheter må returneres til returadressen. Resirkuleringssymbolet indikerer: Ikke husholdningsavfall.

N-Tester BT bruker 2 stk. alkaliske (ikke-oppladbare) AA-batterier. (LR06) For å skifte batterier, åpne batterirommet med en PH1 skrutrekker. Tomme batterier må fjernes og tas med til nærmeste innsamlingspunkt. Batterier skal aldri kastes i husholdningsavfall.

Dette produktet overholder alle gjeldende EU direktiv. Den fullstendige teksten til EUs samsvarserklæring er tilgjengelig på følgende internettadresse:
<https://support.at.farm/hc/sections/9009934274844>

Spesifikasjoner



support@at.farm
https://ntbtmanual.at.farm



Temperaturområde	0 - 50 °C
Fuktighetsområde	≤ 85 %
Høyde	≤ 2000 m
Driftssted	Utendørs
Forurensningsgrad	2 (som definert i IEC 61010-1)
Beskyttelse mot vann	Beskytt enheten mot kraftig regn eller nedsenking i væske!

Kommunikasjon	Bluetooth® LE V4.1 / V4.2 / V 5.2
Radiofrekvens	2402 - 2480 MHz
Radiosendekraft	ca. 1 dBm
Batterier	2 X AA, 1.5 V (Alkaliske)
Dimensjoner	175 x 60 x 40 mm
Vekt (med batterier)	200 g

Legal



Openstore24 GmbH & Co KG
c/o Yara International ASA
Eichenstrasse 1A
3385 Gerersdorf
Austria



Yara International ASA
Drammensveien 131
0277 Oslo
Norway

The following text is in English for legal reasons.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Yara is under license. Other trademarks and trade names are those of their respective owners.

List of the used Open-source Components

The listed Open-source software (OSS) components are used within the device under the terms of the respective licenses. The source code corresponding to the Open-source software components is also provided along with the product wherever mandated by the respective OSS license.

Included OOS components: STM32Cube generated files, STM32 Examples

Copyright(c) 2012-2020 STMicroelectronics

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of stmicroelectronics nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

This software is provided by the copyright holders and contributors "as is" and any express or implied warranties, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose are disclaimed. In no event shall the copyright holder or contributors be liable for any direct, indirect, special, exemplary, or consequential damages (including, but not limited to, procurement of substitute goods or services; loss of use, data, or profits; or business interruption) however caused and on any theory of liability, whether in contract, strict liability, or tort (including negligence or otherwise) arising in any way out of the use of this software, even if advised of the possibility of such damage.

Licence	Copyright
BSD 3-Clause license https://opensource.org/licenses/BSD-3-Clause	Copyright (c) 2012-2022 STMicroelectronics
Apache License, Version 2.0 https://opensource.org/licenses/Apache-2.0	Copyright (c) 2012-2023 STMicroelectronics Copyright (c) 2009-2019 Arm Limited
Ultimate Liberty license https://www.st.com/SLA0044	Copyright (c) 2012-2021 STMicroelectronics
MCD-ST Liberty SW License Agreement V2 https://www.st.com/software_license_agreement_liberty_v2	Copyright (c) 2012-2020 STMicroelectronics